



NAVTEX3


Active Navtex Receive Marine Antenna

NAVTEX3 is a high quality fibreglass omnidirectional Navtex antenna. The NAVTEX3 is manufactured in premium quality materials in order to prevent galvanic corrosion.

The NAVTEX3 has an amplifier integrated and a ground cable attached.


NAVTEX3 is subject for improvement at all times. The antenna has the same rugged design as all other AC Marine antennas thus it withstands harsh environmental conditions.

Electrical specifications:

Frequency range (MHz)	490 / 518 / 4209.5
Nominal impedance (ohm)	50
Output max (dBm)	10
Supply voltage (V)	9-12 
Supply current (mA)	10
IP3 - Low Bands (dBm)	+20
IP3 - High Band (dBm)	+27
Polarization	Vertical
Connector	UHF-female
DC-shorted	No (AC ground through ground cable)

Mechanical specifications:

Length (m/ft)	0.32/1.05
Weight (kg/lbs)	0.15/0.33
Wind rating (m/s / mph)	45/101
Material	Polyethylene
Colour	White (moulded)
Temperature range (°C/°F)	-40 to +60 / -40 to +140

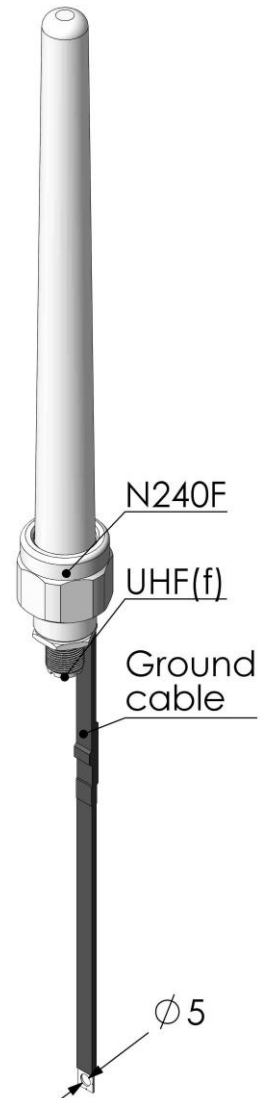

Mounting:

N240F mount included.

Can be used with all 1¼-11 TPI standard AC Marine mounting equipment.